






NB! For installation of fittings with Sensor please find additional information in separate Sensor manual on www.defa.com or scan enclosed QR-code.




Spacers

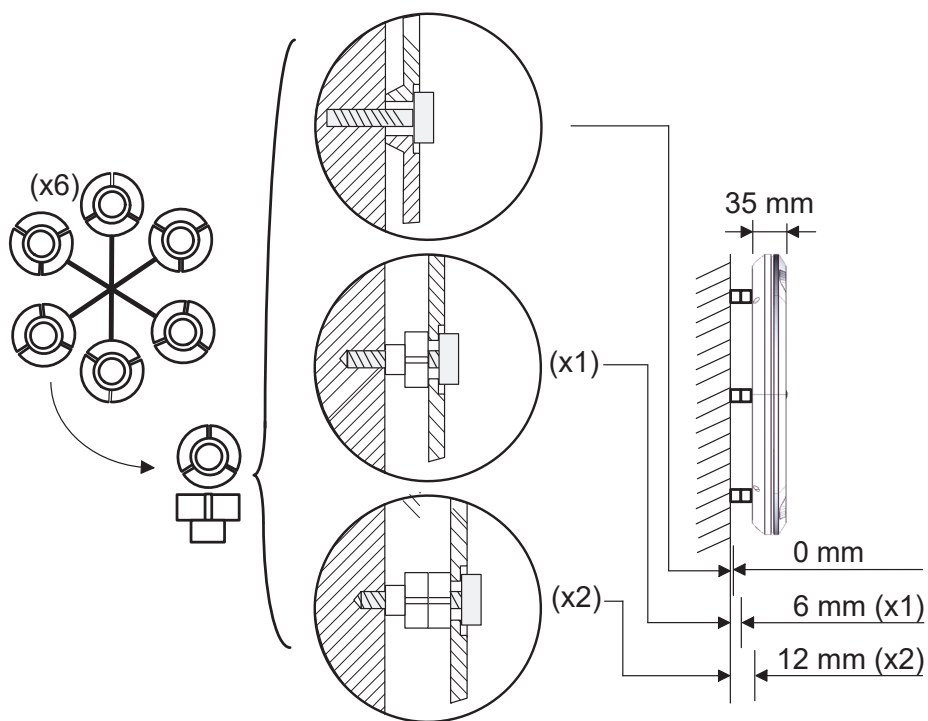


Connect

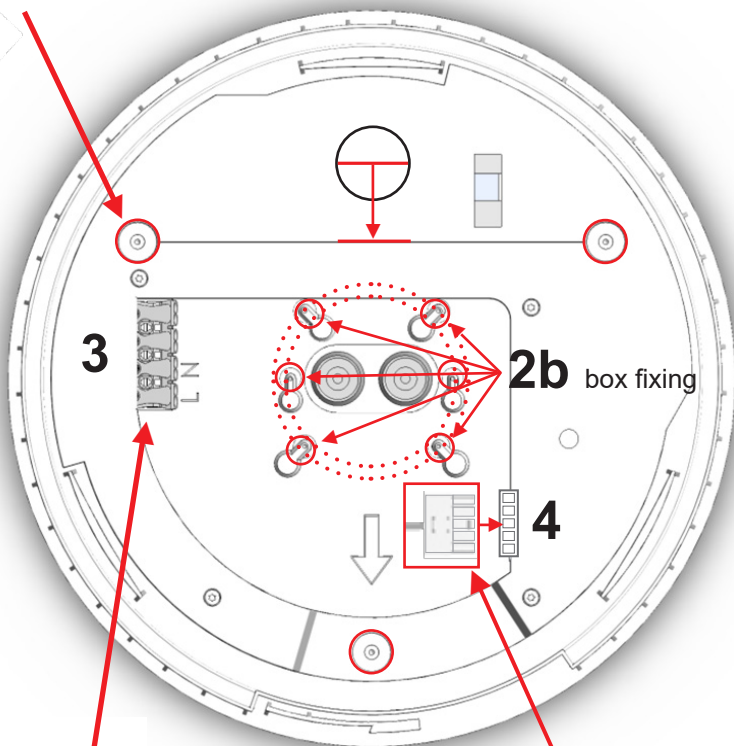1**2a** screw fixing**3x****3****2b**


box fixing

4**5**


Close

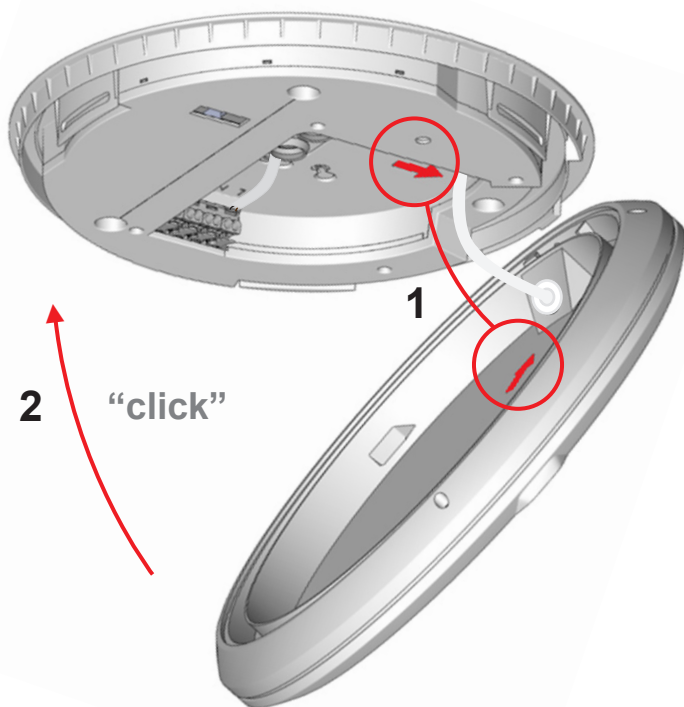


Open

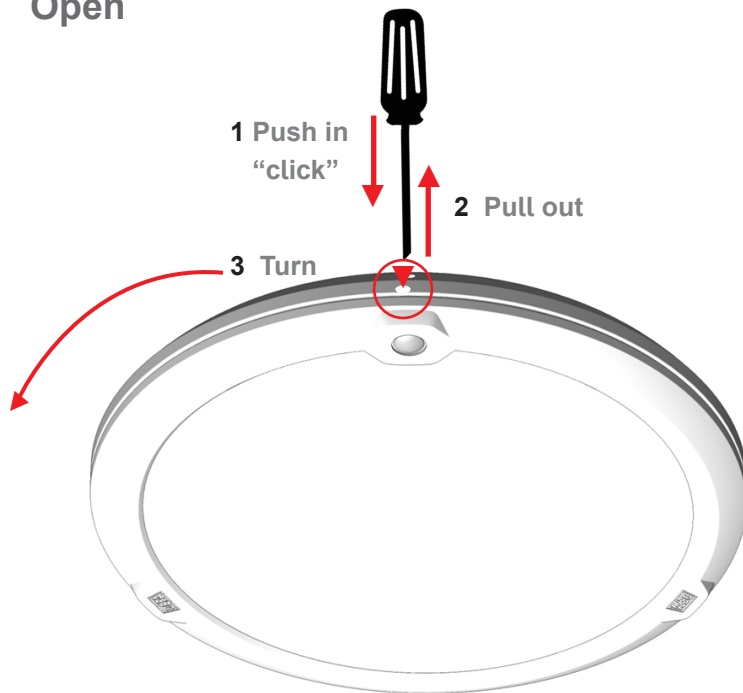

SwitchDim (max 25 units)

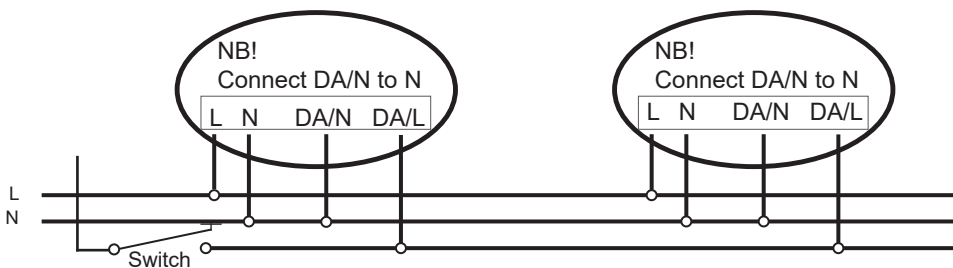

DALI

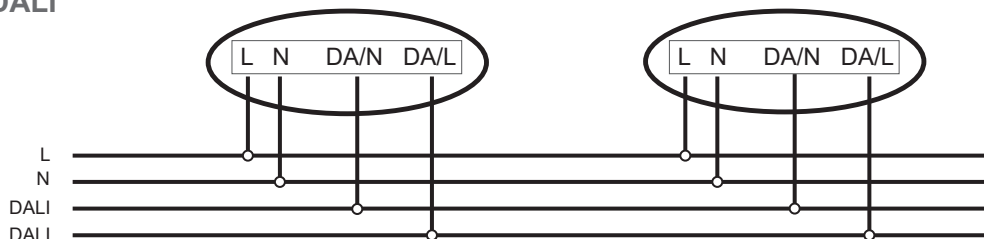

LightAdjust settings

Table 1.1 Standard OnOff 3000K

W	lumen out	1	2	3	
4,6	501	○	○	○	●
5,7	665	○	○	●	↑
6,7	817	○	●	○	⌞
7,8	977	○	●	●	⌞
9,4	1193	●	○	○	↓
10,4	1340	●	○	●	○
11,3	1469	●	●	○	
12,3	1595	●	●	●	

Table 1.2 Standard OnOff 4000K

W	lumen out	1	2	3	
4,5	507	○	○	○	●
5,7	678	○	○	●	↑
6,7	836	○	●	○	⌞
7,8	1004	○	●	●	⌞
9,4	1236	●	○	○	↓
10,4	1380	●	○	●	○
11,4	1511	●	●	○	
12,3	1649	●	●	●	

Table 2.1 MinMaxOff 3000K

W	lumen out	1	2	3	
10,1	1250	○	○	○	●
13,6	1730	●	○	○	↑
14,7	1891	○	●	○	⌞
18,3	2361	●	●	○	⌞
19,9	2567	○	●	●	↓
23,5	3022	●	●	●	○

Table 2.2 MinMaxOff 4000K

W	lumen out	1	2	3	
10,1	1297	○	○	○	●
13,6	1791	●	○	○	↑
14,7	1959	○	●	○	⌞
18,3	2450	●	●	○	⌞
19,9	2665	○	●	●	↓
23,5	3141	●	●	●	○

Sensor settings

	Detection range	Hold period	Daylight sensor	Standby period	Standby dim level	
	1 2	3 4	5 6	7 8	9	●
I	●● 100%	●● 5s	●● Off	●● 0s	● 10%	↑
II	●○ 75%	●○ 30s	●○ 50lux	●○ 10s	○ 30%	⌞
III	○● 50%	○● 3m	○● 10lux	○● 30m		↓
IV	○○ Off	○○ 10m	○○ 5lux	○○ ∞		○