

DEFA ShowroomCharger


30 - 32A | DISCRET - POWERFUL - SILENT

Enhance customer experience by ensuring a fully functional vehicle in your showroom, to make a good first impression

Keep your vehicles fully functional, ready for demonstration in a clean looking showroom. The ShowroomCharger 30-32A is our most compact charger, designed using modern switch-mode technology with 7 steps charging curve that optimizes battery performance and longevity. It can be used on all AGM, GEL, EFB and Lead Acids batteries. The charger can be easily placed under the car or the hood, out of view for your customers thanks to its compact size and detachable cables. Rubber feet and corners are available for further protection. You can upgrade the software at any time via the separate USB port.



Detachable cables for easier handling

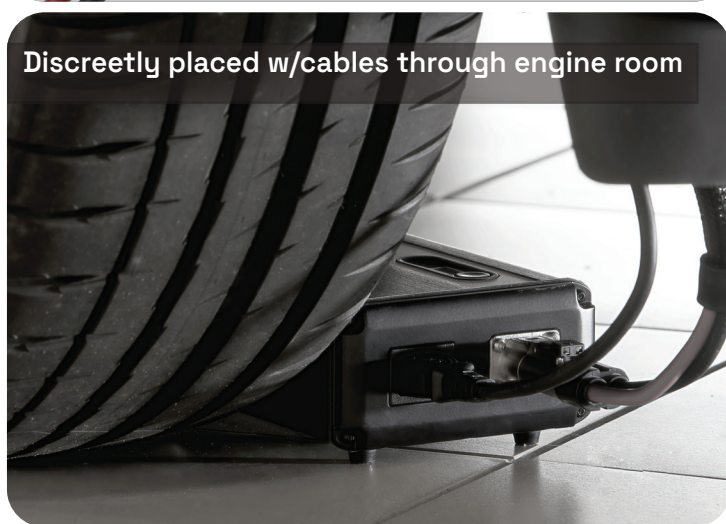

Discretely placed w/cables through engine room



Compact and no noise

ShowroomCharger 30 - 32A
Item no: 707373

Detailed product features and technical information:

SELF COOLING TECHNOLOGY

Specially programmed to prevent overheating while maintaining optimal charge.

OPTIMALCHARGING

7 step charging curve

LONG LASTING LIFESPAN

USB port allows software update in accordance with new OE changing requirements

DETACHABLE CABLE

Heavy duty DC detached cable for ease connection and routing through engine compartment



COMPACT DESIGN

Finished in elegant black anodized aluminum.

SILENT

No fan means silent operation in your showroom.

SAFE IN USE


Non-Sparking, reverse polarity protected and short circuit proof.

INTUITIVE DISPLAY

Easy to monitor charging status.

EASY TO USE


one button operation with easy to read LED state of charge display.

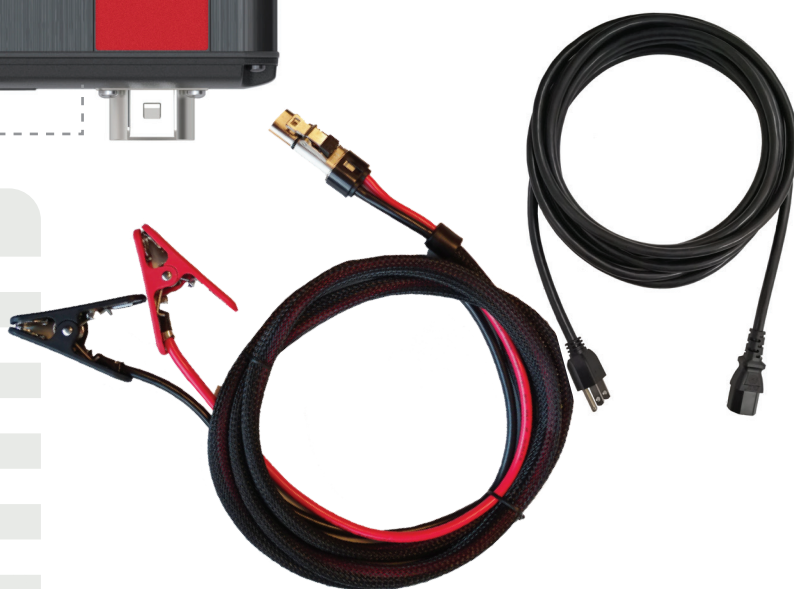

ShowroomCharger 30-32A

| | |
|------------------------------|------------------------------|
| Input voltage [VAC] | 110-240 (@ 50-60Hz) |
| Operating temp. [°C] or [°F] | -20/+40 or -4/+104 |
| Charging voltage [VDC] | 14.4 |
| Maintenance charging [VDC] | 13.6 |
| AC Power Cord [m/ft] | 5/16.4 |
| Charging current at 120 [A] | 30 |
| Charging current at 230 [A] | 32 |
| Battery size, max [Ah] | 250 |
| IP rating [IP] | 40 |
| H/W/D [cm] or [inch] | 22.7/12.5/6.2 or 8.9/4.9/2.4 |
| Weight [kg/Lbs] | 1.7/3.75 |
| Item number | 707373 |

Charging curve:

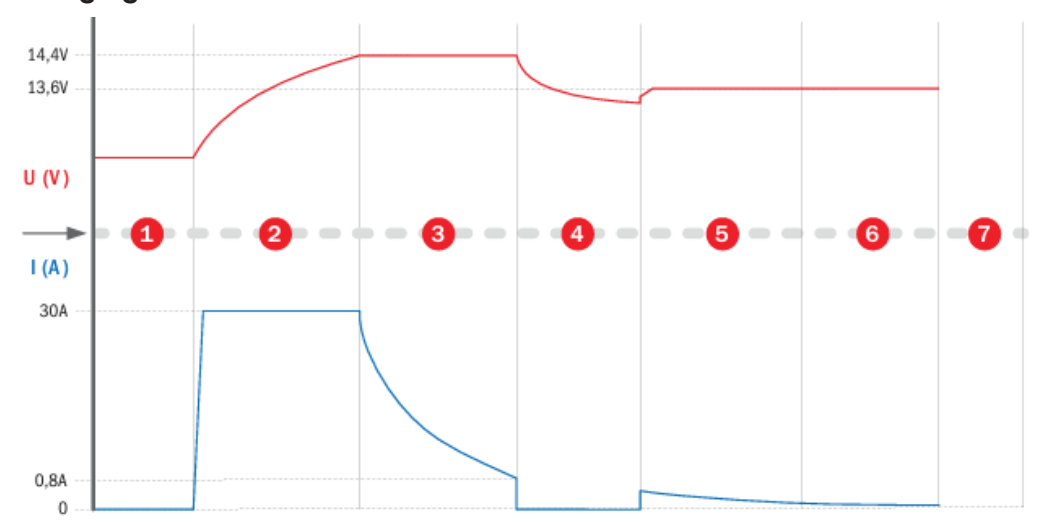

More information on defa.com, or contact DEFA North America

Email: defa.northamerica@defa.com or Phone: 1.888.539.DEFA (3332) Ext 2 or 3.