



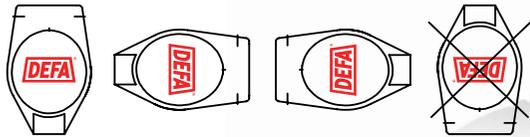

120V~60Hz

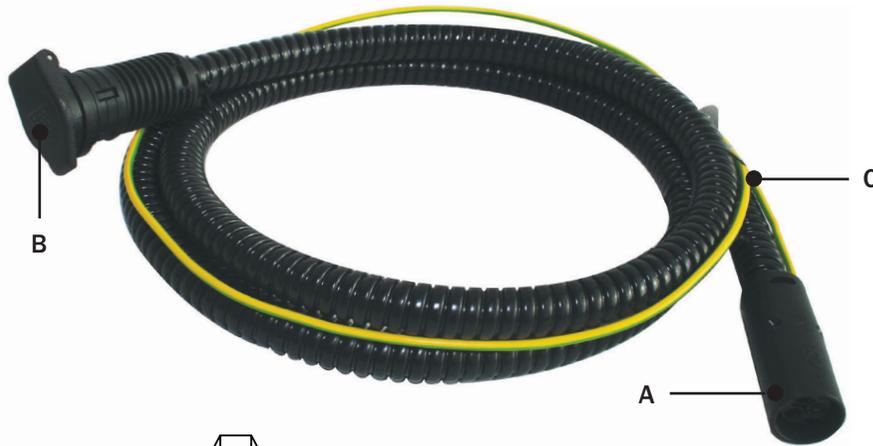

## MiniPlug Inlet cables

DEFA PlugIn inlet cable consists of an armoured cable with the PlugIn plug in one end (A) and the DEFA MiniPlug contact (B) with cover in the other end. An extra yellow earth cable (C) is also fitted in the PlugIn end.

The MiniPlug is suitable for all new vehicles. It is easily flush mounted to the holder. The MiniPlug was developed with functional design, safety, maximum ease of installation and optimal user-friendliness in mind.

There are two options for installing DEFA MiniPlug:

- Flush mounted in the front or on the bodywork of the vehicle.
- Mounted on the holder in existing receptacles in the front of the vehicle.

The enclosed holder can be positioned in several different ways to facilitate a functional arrangement. Upon request, the contact can be painted in the color of the vehicle, thus making it virtually invisible when flush mounted.

DEFA AS is conforming to the requirements of both ISO 9001-2008, ISO 14001:2004 and OHSAS 18001:2007. In addition to this, our engine heaters and cables are conforming to the requirements of ISO/TS 16949:2002.

### Item number

- #460975 (0.8m/2.62 ft.) Weight : 276gr. (9.7 oz)
- #460976 (1.5m/4.92 ft.) Weight : 488gr. (17.2 oz)
- #460977 (2.0m/6.56 ft.) Weight : 639gr. (22.5 oz)
- #460978 (3.0m/9.84 ft.) Weight : 851gr. (30 oz)
- #460979 (5.0m/16.4 ft.) Weight : 1548gr. (3.4 lb)

### Assembly box

- #460975 (0.8m/2.624 ft.) 800pcs Weight: 221kg (487 lb)
- #460976 (1.5m/4.92 ft.) 800pcs Weight: 391kg (862 lb)
- #460977 (2.0m/6.56 ft.)
- #460978 (3.0m/9.84 ft.)
- #460979 (5.0m/16.4 ft.)

### Usage and Installation

If at all possible, the inlet cable's MiniPlug (B) contact should be mounted so that the front of the MiniPlug faces downwards at an angle for drainage.

The MiniPlug connector must be installed in a place where it will be protected from splash water and mechanical damage and so that the DEFA MiniPlug connecting cable easily can be connected.

Please read and follow the enclosed installation guide.

### Maintenance

Apply some silicon spray on the MiniPlug contact terminals under the cover (B) before and after the season and ensure that either the cable or cover is damaged. Install a new cable if the cover is damaged.

### Technical specifications

Voltage [V]	120
Fuse [A]	15
Lenght [m]	0.8 - 1.5 - 2.0 - 3.0 - 5.0
Enclosure rating	TYPE 3R
Certifications	UL 817 CSA C22.2 No 21

[www.defa.com](http://www.defa.com)