
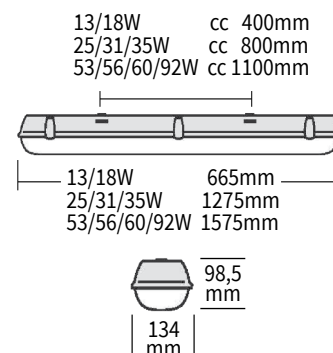


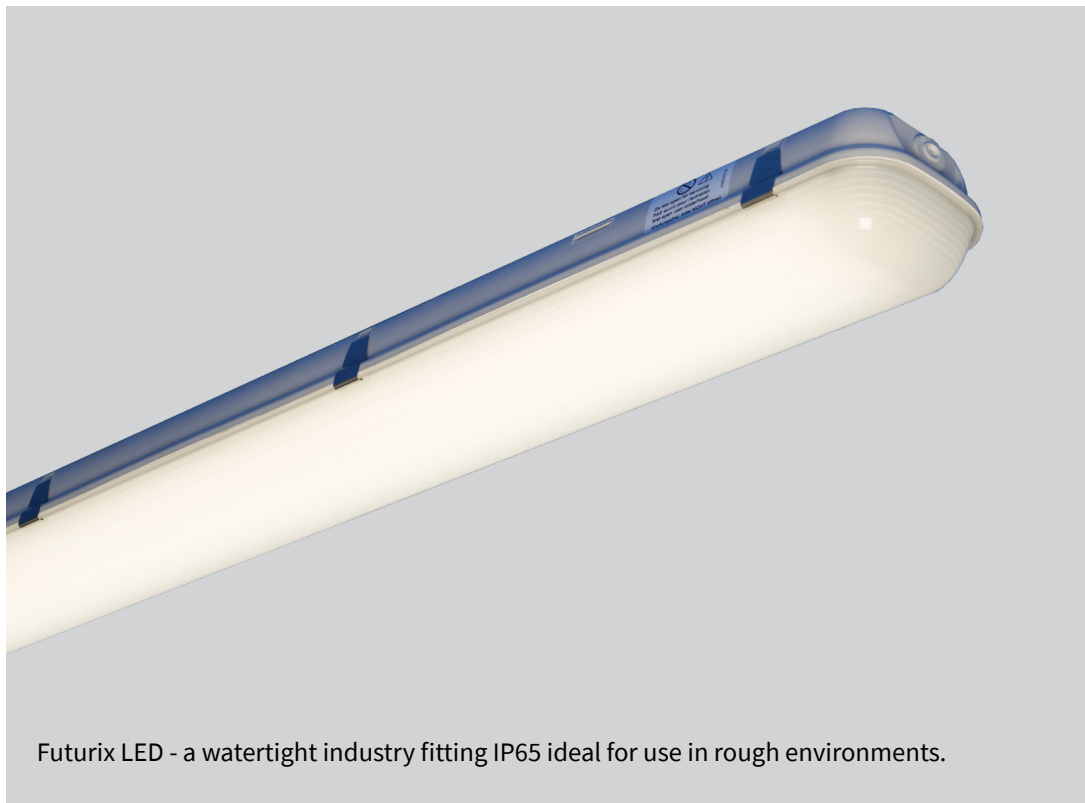

Futurix LED - a watertight industry fitting IP65 ideal for use in rough environments.

Description

Surface mounted industry fitting with diffuser and wide light distribution. Body in light grey glass-fibre armed polyester. Diffuser in opal/frosted polycarbonate (IK08) giving a evenly and soft light. Fixing clips in stainless steel.

Application areas

Industry facilities, agriculture, garage, P-house, warehouse etc.

Installation

Cable entries with sealings in both ends. Through wiring facility as standard with 5x2,5mm² push-in terminal block in each end.

Mounting

Direct in ceiling or on wall by use of fixing brackets supplied incl. with the fitting. Wire and wall brackets are available as accessories.

LED driver

Electronic and high-frequency LED-driver from approved manufacturers.

Others

Available on request:

- PC body and diffuser - IK10
- IP66 version by change to PG gland (accessories)
- Versions with quick connector
- 830 or 850 color temperature
- Ra 90

DALI versions are prepared for Touch & dim.

Fittings (pcs) each circuit

	10-B	10-C	16-B	16-C
14/20/27W	20	34	33	56
17/23/27/34/40/55W DALI	13	21	21	35
34/56/63W	13	22	22	37
63W DALI	15	24	24	40
92W			22	
92W DALI			22	

Colour index Ra:

80

Colour tolerance MacAdam:

3

Lifetime:

Ta 25°C:


L80B10 100.000t

Ta max:

L80B10 50.000t




LED technique for optimal luminous flux and efficiency

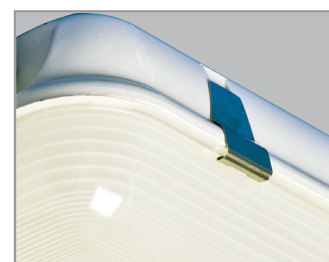

Fixing clips in stainless steel



Versions with Quick connector

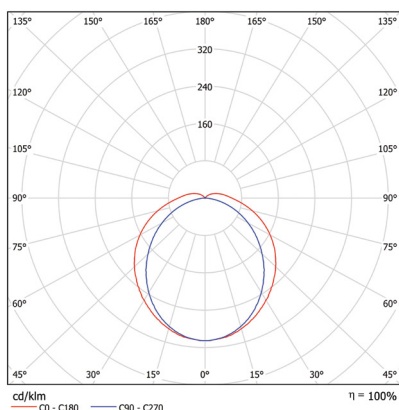

Futurix 37W

DEFA no.	Type	Module	Light source		lm fitting	lm/W	Control	Ta max	Ta min	Weight
127560	Futurix	665mm	13W	830	1900	146		40°C	-20°C	1,8 kg
127552	Futurix	665mm	13W	840	2000	153		40°C	-20°C	1,8 kg
127561	Futurix	665mm	18W	840	2700	150		40°C	-20°C	2,3 kg
127554	Futurix	1275mm	25W	830	3914	156		40°C	-20°C	2,9 kg
127562	Futurix Radar	1275mm	25W	830	3914	156	Sensor	40°C	-20°C	3,0 kg
127549	Futurix	1275mm	25W	840	4120	164		40°C	-20°C	2,9 kg
127558	Futurix	1275mm	25W	840	4120	164	DALI	40°C	-20°C	2,9 kg
127556	Futurix Radar	1275mm	25W	840	4120	164	Sensor	40°C	-20°C	3,0 kg
122475	Futurix Emergency	1275mm	27W	840	4340	161	3h self-test	30°C	5°C	3,0 kg
127548	Futurix	1575mm	31W	840	5150	166		40°C	-20°C	3,8 kg
127550	Futurix	1575mm	31W	840	5150	166	DALI	40°C	-20°C	3,8 kg
127555	Futurix Radar	1575mm	31W	840	5150	166	Sensor	40°C	-20°C	3,9 kg
122719	Futurix Emergency	1575mm	37W	840	5530	149	3h self-test	30°C	5°C	3,9 kg
127559	Futurix	1275mm	35W	840	5600	160	DALI	40°C	-20°C	3,8 kg
127563	Futurix	1575mm	53W	830	7695	145	DALI	38°C	-20°C	3,8 kg
127546	Futurix	1575mm	53W	840	8100	153		38°C	-20°C	3,8 kg
127553	Futurix	1575mm	53W	840	8100	149	DALI	38°C	-20°C	3,8 kg
127557	Futurix Radar	1575mm	53W	840	8100	153	Sensor	38°C	-20°C	3,9 kg
119729	Futurix Emergency	1575mm	56W	840	7760	139	3h self-test	30°C	5°C	3,9 kg
127547	Futurix	1575mm	60W	840	8900	150		35°C	-20°C	3,8 kg
127551	Futurix	1575mm	60W	840	8900	150	DALI	35°C	-20°C	3,8 kg
122472	Futurix Radar	1575mm	66W	840	9030	137	Sensor	35°C	-20°C	3,9 kg
122686	Futurix AC/DC	1575mm	56W	840	7760	139		38°C	-20°C	3,8 kg
122687	Futurix AC/DC	1575mm	56W	840	7760	139	DALI	38°C	-20°C	3,8 kg
127564	Futurix	1575mm	92W	840	13970	152		35°C	-20°C	3,8 kg
127565	Futurix	1575mm	92W	840	13970	152	DALI	35°C	-20°C	3,8 kg

Fixing bracket 118995 are supplied incl. with the fitting

Accessories:

114079	Wall bracket 45° - galvanized	pair	
109549	Wall bracket - adjustable - corrosion class 3	pair	
111730	Suspension hook for wire	1 pcs	use in combination with the fixing bracket
114084	Wire bracket - max 6mm	pair	use in combination with the fixing bracket
xxxxxx	PG M20 gland with locknut	kit	for upgrad to IP66 version



Fixing bracket in stainless steel - supplied incl. with the fitting




Suspension hook for wire - use in combination with the fixing bracket



Wire bracket max 6mm - use in combination with the fixing bracket



Wall bracket 45° - galvanized

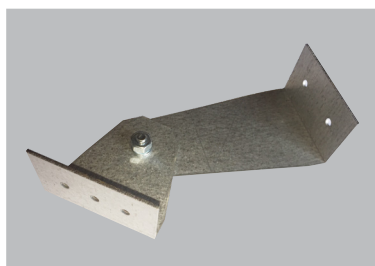

Adjustable wall bracket - corrosion class 3