


17/23W cc 400mm
30/45W cc 800mm
37/56/66W cc 1100mm



Futurix LED - a watertight industry fitting IP65 ideal for use in rough environments.

Description

Surface mounted industry fitting with diffuser and wide light distribution. Body in light grey glass-fibres armed polyester. Diffuser in opal/frosted polycarbonate (IK08) giving a evenly and soft and light. Fixing clips in stainless steel.

Application areas

Industry facilities, agriculture, cold-storage room, garage, parking, warehouse...

Installation

Cable entries with sealings in both ends, knock-outs on top of the fitting. Through wiring facility as standard with 5x2,5mm² push-in terminal block in each end.

Mounting

Direct in ceiling or on wall. Available with fixing brackets to avoid taking holes in the body.

LED driver

Electronic- and high-frequency LED-driver from approved manufacturers.

Others

830 or 850 color temperature or Ra 90 available on request.

Fittings each circuit - 16-B

17/23W		33 pcs.
17/23W	DALI	38 pcs.
30/37/56/66W		24 pcs.
30/37/56/66W	DALI	24 pcs.


Colour index Ra:	80
Colour tolerance MacAdam:	3
Lifetime:	L70B10 70.000h



LED technique for optimal luminous flux and efficiency



Fixing clips in stainless steel

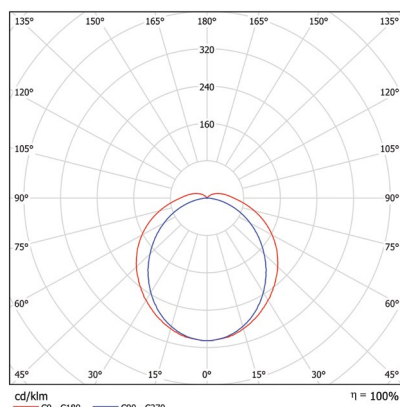

Futurix 37W

DEFA no.	Type	Diffuser	Light source	lm fitting	lm/W	Control	Ta max	Ta min	Weight
119361	Futurix	Opal	17W 4000K	2210	130		40°C	-20°C	1,8 kg
119956	Futurix	Opal	23W 4000K	3120	136		40°C	-20°C	2,3 kg
118751	Futurix	Opal	30W 4000K	4420	147		40°C	-20°C	2,9 kg
121271	Futurix	Opal	30W 4000K	4420	147	DALI	40°C	-20°C	2,9 kg
120015	Futurix Radar	Opal	30W 4000K	4420	147	Sensor	40°C	-20°C	3,0 kg
122475	Futurix Emergency	Opal	30W 4000K	4420	147	3h selftest	40°C	-20°C	3,0 kg
119294	Futurix	Opal	37W 4000K	5530	149		40°C	-20°C	3,8 kg
120455	Futurix	Opal	37W 4000K	5530	149	DALI	40°C	-20°C	3,8 kg
120479	Futurix Radar	Opal	37W 4000K	5530	149	Sensor	40°C	-20°C	3,9 kg
122719	Futurix Emergency	Opal	37W 4000K	5530	149	3h selftest	40°C	-20°C	3,9 kg
119295	Futurix	Opal	56W 4000K	7760	139		38°C	-20°C	3,8 kg
120101	Futurix	Opal	56W 4000K	7760	139	DALI	38°C	-20°C	3,8 kg
120582	Futurix Radar	Opal	56W 4000K	7760	139	Sensor	38°C	-20°C	3,9 kg
119729	Futurix Emergency	Opal	56W 4000K	7760	139	3h selftest	38°C	-20°C	3,9 kg
121196	Futurix	Opal	66W 4000K	9030	137		35°C	-20°C	3,8 kg
121197	Futurix	Opal	66W 4000K	9030	137	DALI	35°C	-20°C	3,8 kg
122472	Futurix Radar	Opal	66W 4000K	9030	137	Sensor	35°C	-20°C	3,9 kg
121574	Futurix	Opal	17W 3000K	2100	124		40°C	-20°C	1,8 kg
121263	Futurix	Opal	30W 3000K	4200	140		40°C	-20°C	2,9 kg
121264	Futurix Radar	Opal	30W 3000K	4200	140	Sensor	40°C	-20°C	3,0 kg
121573	Futurix	Opal	56W 3000K	7372	132	DALI	38°C	-20°C	3,8 kg
122686	Futurix AC/DC	Opal	56W 4000K	7760	139		38°C	-20°C	3,8 kg
122687	Futurix AC/DC	Opal	56W 4000K	7760	139	DALI	38°C	-20°C	3,8 kg

Fixing bracket 118995 applied incl with the fitting.

Accessories:

114079	Wall bracket 45° - galvanized	pair	
109549	Wall bracket - adjustable - corrosion class 3	pair	
111730	Suspension hook for wire	1 pcs	use in combination with the fixing bracket
114084	Wire bracket - max 6mm	pair	use in combination with the fixing bracket




Fixing bracket in stainless steel - supplied ncl. with the fitting




Suspension hook for wire - use in combination with the fixing bracket



Wire bracket max 6mm - use in combination with the fixing bracket

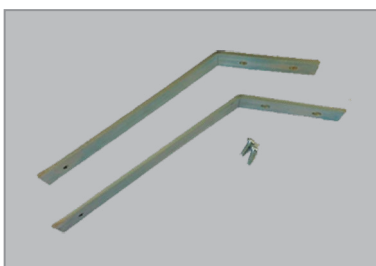

Wall bracket 45° - galvanized

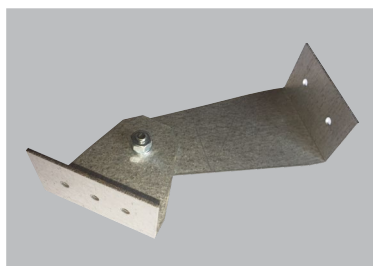

Adjustable wall bracket - corrosion class 3