
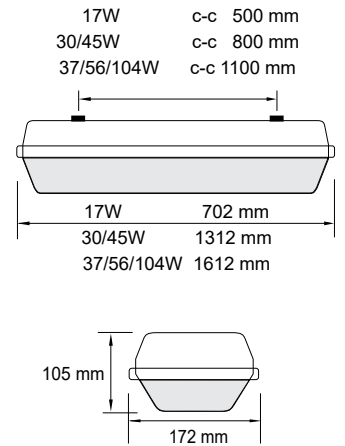



Proof LED

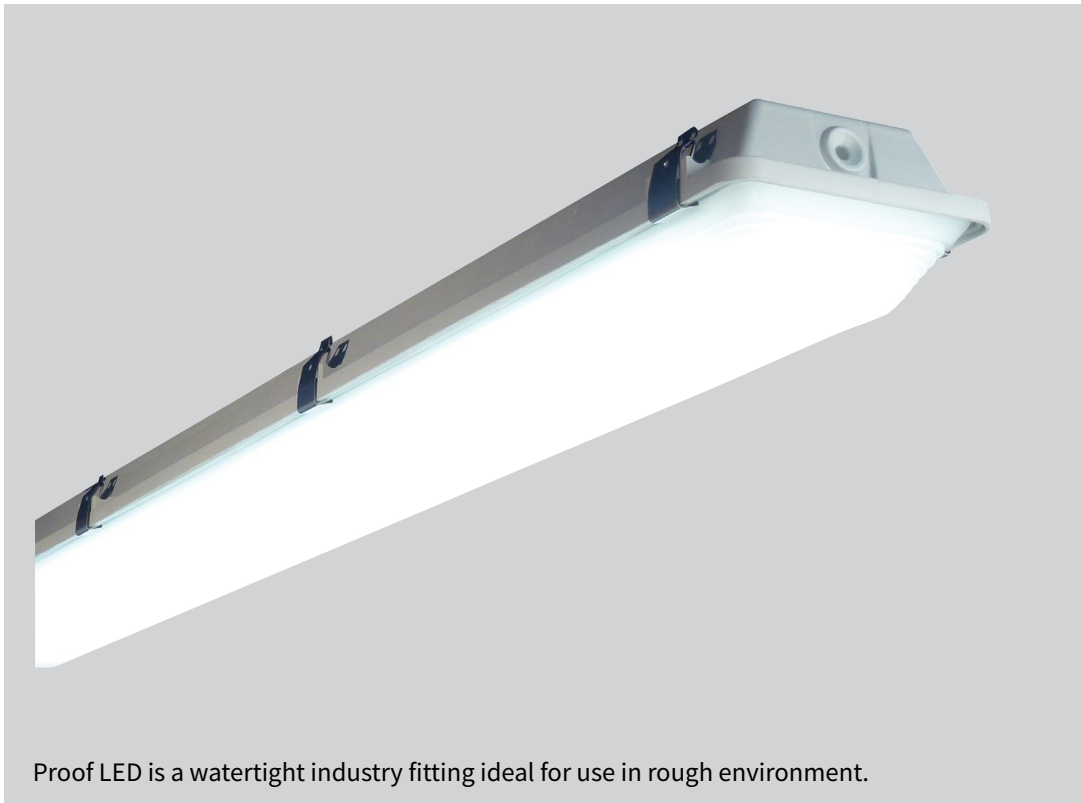

Proof LED is a watertight industry fitting ideal for use in rough environment.

Description

Surface mounted industry fitting with diffuser and wide light distribution. Body in light grey glas-fiber armed poyester. Diffuser in opal polycarbonate giving a evenly and soft and light. Fixing clips in stainless steel. IK08, IP65, PAS versions IP67.

Application areas

Proof is ideal for use in different industry facilities, agriculture, cold-storage room, parking, outdoor etc...

Mounting

Direct in ceiling or on wall. Available with fixing brackets, wire fixing and wall brackets.

Installation

Cable entries with sealings in both ends, knock-outs on top of the fitting. Through wiring facility as standard with 5x2,5mm² push-in terminal block in each end.

Other

Available with movment sensor or build-in emergency unit with battery pack on request.


Colour index Ra	80
Colour tolerance MacAdam	3
Life time	L70B10 70.000h




High quality LED RA 80



Stainless steel fixing with safety screw

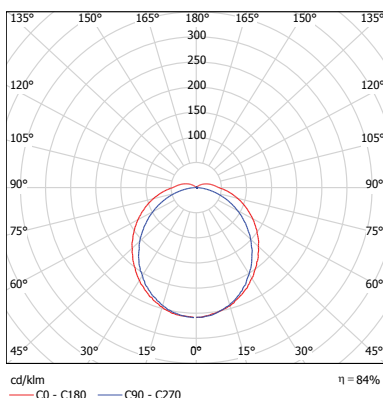

Proof opal diffuser

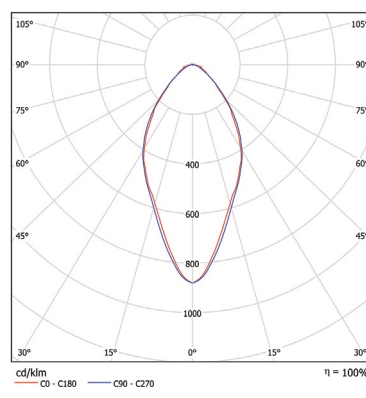


Proof clear diffuser

DEFA no.	Type	Modul	Diffuser	Tot. effect	lm fitting	lm/W	Control	IP	Ta max	Ta min	Weight
116310	Proof	700mm	Opal	17W	4000K	2140		IP65	45°C	-20°C	3,0 kg
117443	Proof	700mm	Opal	17W	4000K	2140	DALI	IP65	45°C	-20°C	3,0 kg
114141	Proof	1300mm	Opal	30W	4000K	4290		IP65	45°C	-20°C	3,7 kg
113619	Proof	1300mm	Opal	30W	4000K	4290	DALI	IP65	45°C	-20°C	3,7 kg
117564	Proof Emerg.	1300mm	Opal	30W	4000K	4290	3h battery	IP65	45°C	-20°C	4,0 kg
114240	Proof	1600mm	Opal	37W	4000K	5530		IP65	45°C	-20°C	4,4 kg
114241	Proof	1600mm	Opal	37W	4000K	5530	DALI	IP65	45°C	-20°C	4,4 kg
117444	Proof	1300mm	Opal	45W	4000K	6020		IP65	45°C	-20°C	3,7 kg
117445	Proof	1600mm	Opal	56W	4000K	7760		IP65	35°C	-20°C	4,4 kg
117525	Proof	1600mm	Opal	56W	4000K	7760	DALI	IP65	35°C	-20°C	4,4 kg
119110	Proof High	1600mm	Clear	56W	4000K	7750		IP65	35°C	-20°C	4,4 kg
122422	Proof PAS	1600mm	Opal	56W	4000K	7600		IP67	40°C	-20°C	4,4 kg
123143	Proof PAS	1600mm	Opal PC	82W	4000K	12000		IP67	35°C	-20°C	4,4 kg
122705	Proof PAS	1600mm	Opal PC	82W	4000K	12000	DALI	IP67	35°C	-20°C	4,4 kg
122610	Proof PAS	1600mm	Opal	104W	4000K	14000		IP67	25°C	-20°C	4,4 kg

Accessories:

110089	Proof fixing bracket	pcs	
114079	Wall bracket 45° - galvanized	pair	
109549	Wall bracket adjustable - corrossions class 3	pair	
111730	Suspension hook for wire	pcs	use in combination with the fixing bracket
114084	Wire braket - max 6mm	pair	use in combination with the fixing bracket

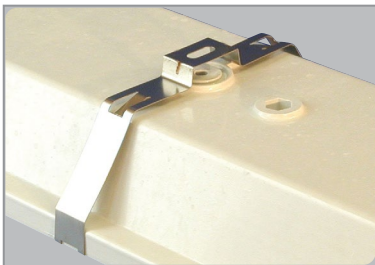

Fixing bracket - stainless steel




Suspension hook for wire - use in combination with the fixing bracket



Wire bracket max 6mm - use in combination with the fixing bracket



Wall bracket 45° - galvanized

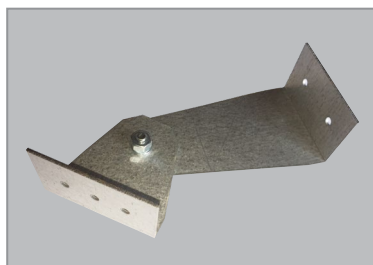

Adjustable wall bracket - corrosion class 3