

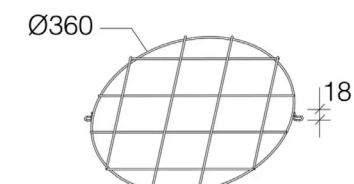


Saturno 2885 Dali



Saturno 2885 Dali - powerful luminaire in aluminium for higher ceiling heights



Beskyttelsesgitter.

Description

Luminaire housing with integrated cooling, made of die-cast aluminium, powder coated in dark grey RAL 7021. Diffuser in polycarbonate, resistant to impacts and shocks. Integrated 4kV surge protection. IP66, Class I, IK08..

Application areas

Industrial premises, warehouses, department stores, exhibition halls, sports halls.

Installation

Saturno is delivered with a mounting eye.

Connection

Sealed cable gland connection, max. 2.5 mm² cable, for quick and easy connection without needing to open the luminaire.

Fittings (pcs) per circuit


	10-B	10-C	16-B	16-C
100W DALI	9	12	14	18
150W DALI	9	9	14	15
200W DALI	5	6	8	9

LED unit

Colour temperature	4000K
Colour index Ra	RA 80
Colour tolerance	MacAdam 3
Ta - 100W 19800lm	Ta -40° - +60°
Ta - 150W 28100lm	Ta -40° - +50°
Ta - 200W 34470lm	Ta -40° - +40°
Lifetime - Ta 25°C	L80B10 100.000t

On request:

Red, blue, green diffuser
10 kV surge protection



PowerSwitch



Diffuser for UGR<22 opal or transparent.

DEFA no.	Type	Optic	Light source	lm fitting	lm/W	Control	Weight (kg)
124875	Saturno	Wide beam	100W	4000K 19800	198	DALI	4,3
126082	Saturno	Wide beam	150W	4000K 28100	187	DALI	4,3
127384	Saturno	Wide beam	200W	4000K 34470	172	DALI	4,3

Accessories

- 128623 Diffuser - 370 mm for Saturno UGR <22 Opal
- 128576 Diffuser - 370 mm for Saturno UGR <22 Transparent
- 122503 Protective guard Ø370

