




NB! For installation of fittings with Sensor please find additional information in separate Sensor manual on www.defa.com or scan enclosed QR-code.






Spacers

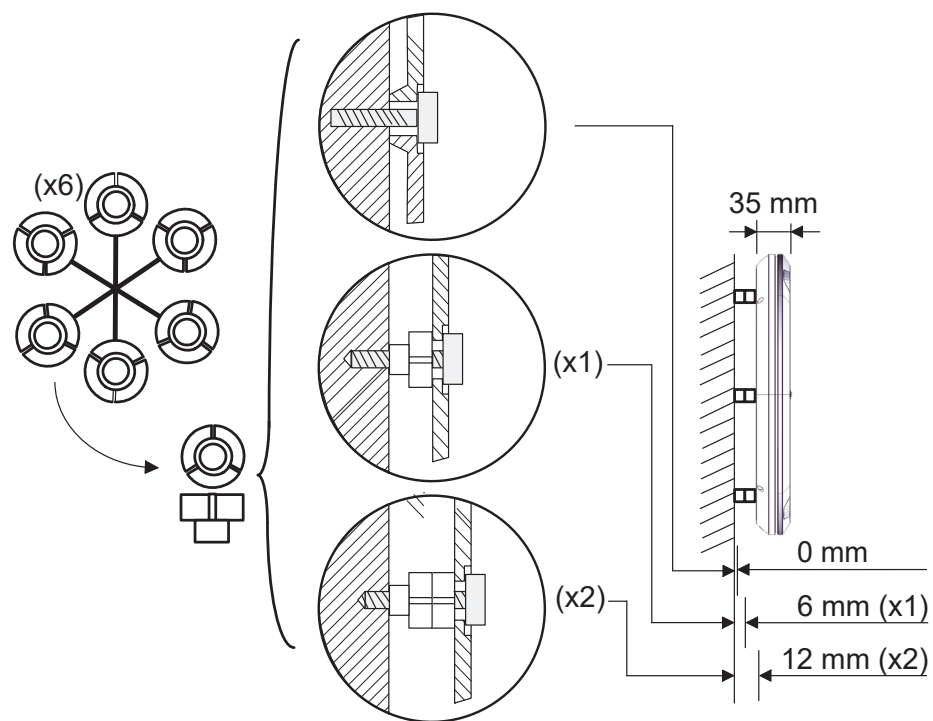


Connect




2a screw fixing

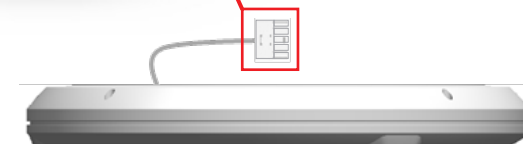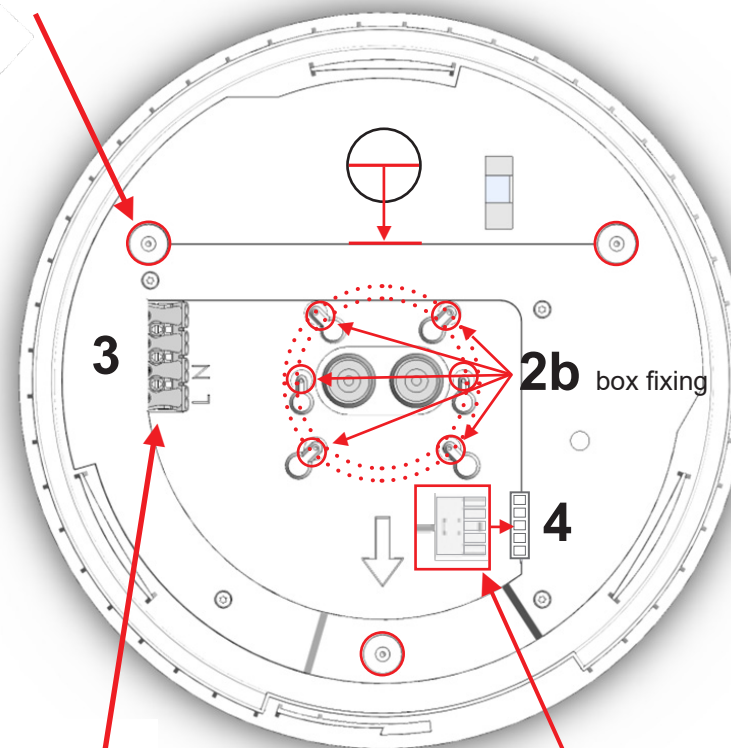

Close

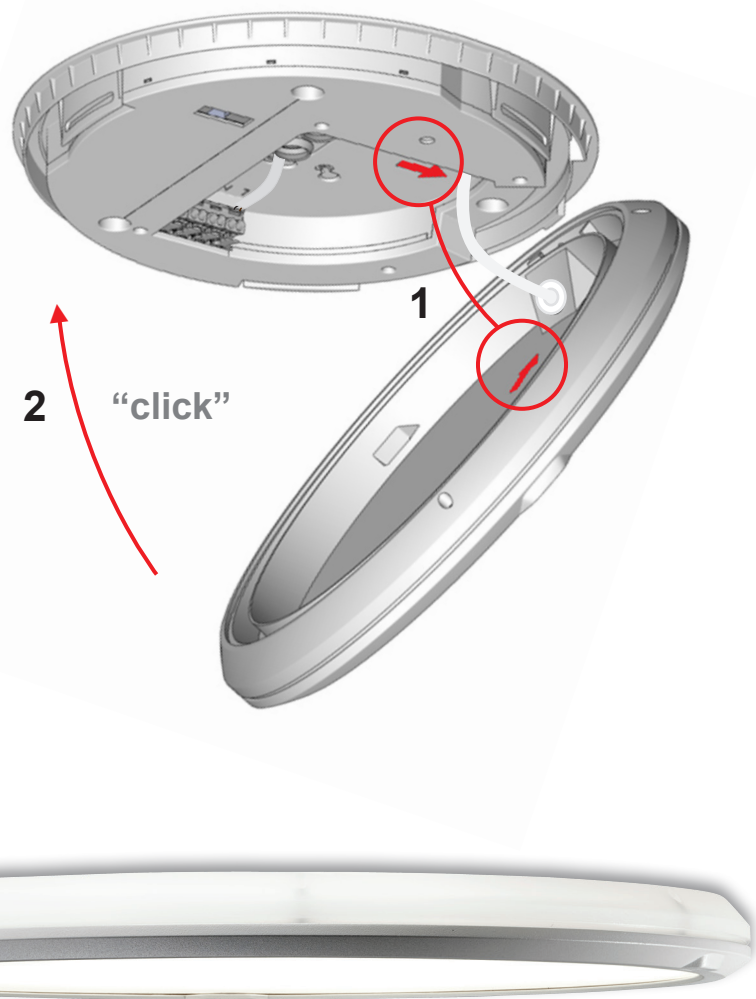

Open

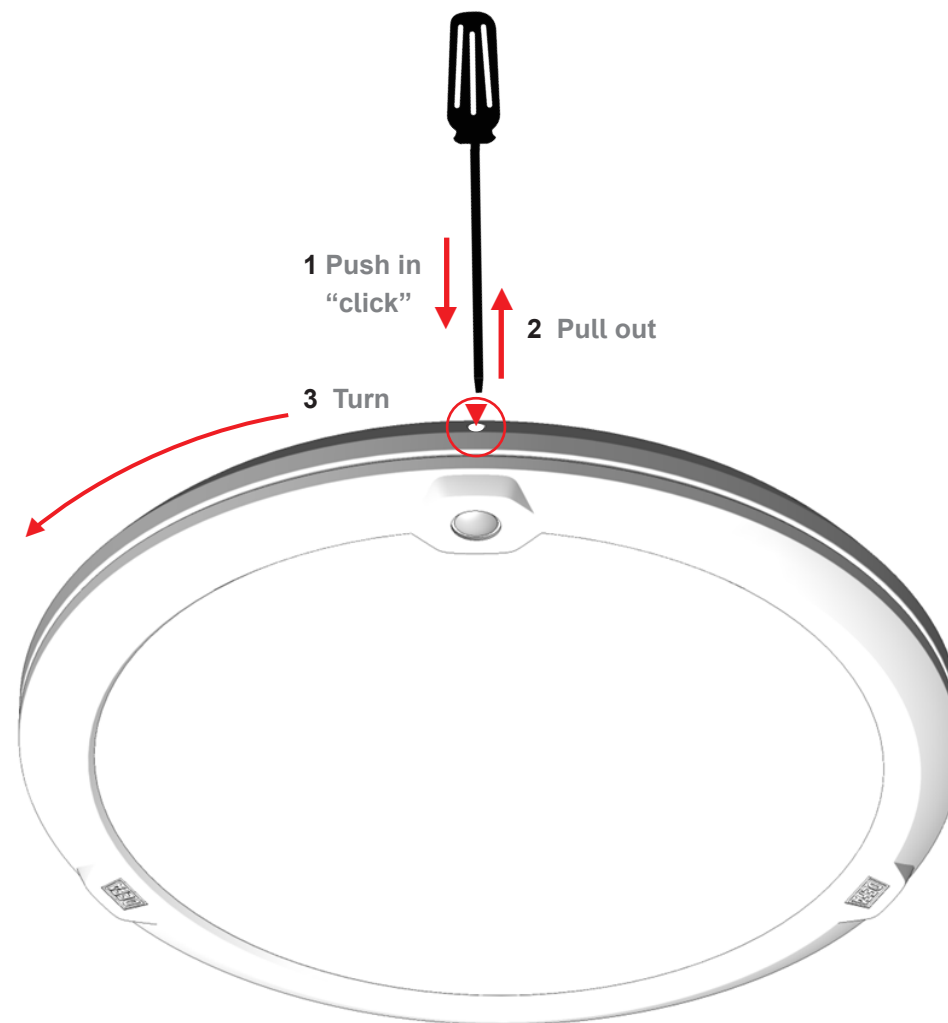


LightAdjust settings

W	lumen out	1	2	3	
4,4	440	○	○	○	●
5,6	560	○	○	●	↑
7,2	720	○	●	○	⏏
8,5	850	○	●	●	⏏
10,3	1030	●	○	○	↓
11,2	1120	●	○	●	○
12,7	1270	●	●	○	
13,4	1340	●	●	●	

Sensor settings

	Detection range	Hold period	Daylight sensor	Standby period	Standby dim level	
	1 2	3 4	5 6	7 8	9	
I	●● 100%	●● 5s	●● Off	●● 0s	● 10%	↑
II	●○ 75%	●○ 30s	●○ 50lux	●○ 10s	○ 30%	⏏
III	○● 50%	○● 3m	○● 10lux	○● 30m		↓
IV	○○ Off	○○ 10m	○○ 5lux	○○ ∞		○

SwitchDim (max 25 units)

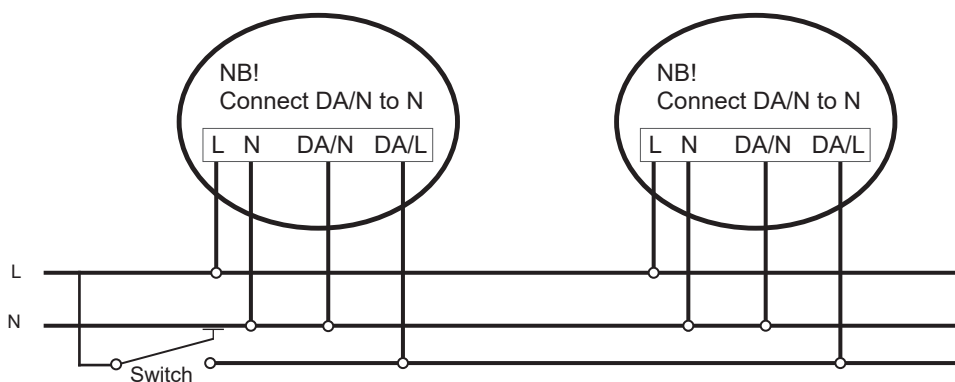

DALI

