

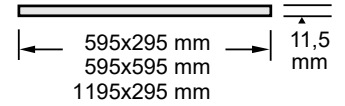


Ledge® Recessed - Micro

New version



Ledge Recessed Micro – Interior fitting with very low building height
 - More efficient LED chips and microprismatic diffuser giving more light without glare

Description

Interior fitting to be recessed in T-profile ceilings. Frame in aluminium powder painted in white RAL 9010. Microprismatic diffuser. Ledge is delivered "plug&play", complete with 1.5m 2-pol cable and plug from driver. DALI version supplied with 1.5m 4pol cable from driver, DALI entries with DA, DA marking. The driver and the LED panel are connected with 1m cable.

Application areas

School, office, meeting facilities, corridors, shops, retirement homes etc...

Mounting


To be placed directly into the T-profile system or recessed in a surface mounted frame.

Others

Ledge Recessed is even prepared for touch-dim & corridor function. When using the IP44 protection plate all 600x600 versions are IP44 rated.

Fittings each circuit - 16A	B	C
22W	50 pcs	83 pcs
22W DALI	80 pcs	132 pcs
39W	25 pcs	41 pcs
39W DALI	20 pcs	33 pcs

Colour index Ra	>80
Colour tolerance MacAdam	3
Life time	L80B10 100.000 h

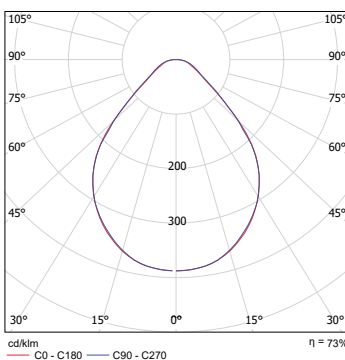

Ledge recessed micro 600x600


Ledge® Recessed - Micro




DEFA no.	Type	Module	Optics	Light source		lm fitting	lm/W	Control
124077	Ledge recessed	600x600	Micro	39W	3000K	4875	125	
124076	Ledge recessed	600x600	Micro	39W	3000K	4875	125	DALI
124071	Ledge recessed	600x300	Micro	20W	3000K	2300	115	
124070	Ledge recessed	600x300	Micro	20W	3000K	2300	115	DALI
124067	Ledge recessed	1200x300	Micro	39W	3000K	4450	114	
124066	Ledge recessed	1200x300	Micro	39W	3000K	4450	114	DALI
124080	Ledge recessed	600x600	Micro	39W	4000K	5100	131	
124079	Ledge recessed	600x600	Micro	39W	4000K	5100	131	DALI
124074	Ledge recessed	600x300	Micro	20W	4000K	2400	120	
124073	Ledge recessed	600x300	Micro	20W	4000K	2400	120	DALI
124069	Ledge recessed	1200x300	Micro	39W	4000K	4680	120	
124068	Ledge recessed	1200x300	Micro	39W	4000K	4680	120	DALI

Accessories:


121272	Frame w. hatch	600x600	White	Surface mounting				
118650	Frame	600x300	White	Surface mounting				
118023	Frame	1200x300	White	Surface mounting				
115819	Frame	600x600	White	Recessed mounting - closed ceilings				
118254	Decor plate	600x600	White	Circular light opening Ø500				
120701	IP44 protection sheet	600x600	Clear	3mm acrylic (Pmma)				
118886	Monting kit			Wire suspension				

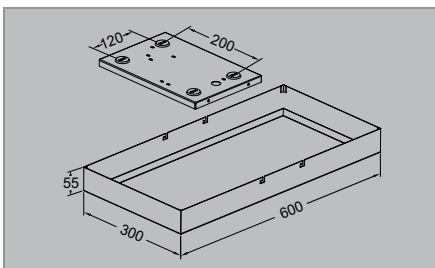

Frame 600x300 - surface mounting

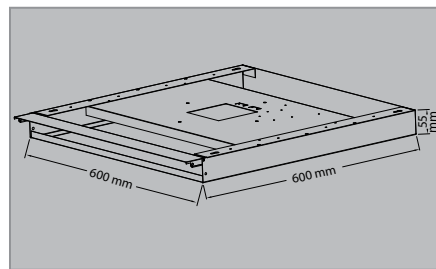

Frame 600x600 w. hatch - surface mounting

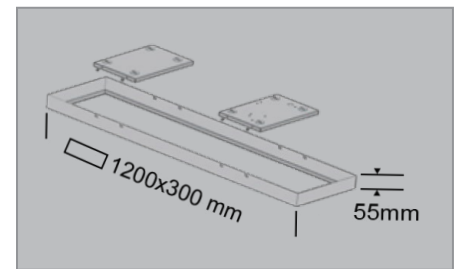

Frame 1200x300 - surface mounting



Decor plate for 600x600 modul - light opening Ø500mm



Ledge Recessed - surface mounted in 600x600 frame



Ledge Recessed - mounted in wire suspension