



Ledge® Recessed - Opal



New generation



Ledge Recessed Opal – Interior fitting with very low building height
Now 30% more efficient



Description

Interior fitting to be recessed in T-profile ceiling. Frame in aluminium powder painted in white RAL 9010. Opal acrylic diffuser. Ledge is delivered "plug&play", complete with 1.5m 2-pol cable and plug from driver. DALI version supplied with 1.5m 4pol cable from driver, DALI entries with DA, DA marking. The driver and the LED panel are connected with 1m cable.

Application areas

School, office, meeting facilities, corridors, shops etc...

Mounting


To be placed directly into the T-profile system or recessed in a surface mounted frame.

Others

Ledge Recessed is even prepared for touch-dim & corridor function. When using the IP44 protection plate all 600x600 versions are IP44 rated.

Fittings each circuit - 16A	B	C
20W	25 pcs	41 pcs
20W DALI	80 pcs	132 pcs
30W	25 pcs	41 pcs
30W DALI	55 pcs	91 pcs

Colour index Ra	>80
Colour tolerance MacAdam	<3
Life time - L80B10	100.000 h

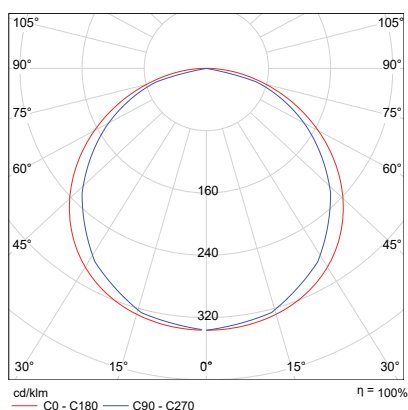


Ledge Recessed opal 600x600


Ledge® Recessed - Opal




DEFA no.	Type	Module	Optics	Light source		lm fitting	lm/W	Control
124342	Ledge recessed	600x600	Opal	18W	3000K	2415	134	DALI
124341	Ledge recessed	600x600	Opal	18W	3000K	2415	134	
124092	Ledge recessed	600x600	Opal	30W	3000K	3938	131	DALI
124091	Ledge recessed	600x600	Opal	30W	3000K	3938	131	
124086	Ledge recessed	600x300	Opal	20W	3000K	2415	121	DALI
124085	Ledge recessed	600x300	Opal	20W	3000K	2415	121	
124083	Ledge recessed	1200x300	Opal	30W	3000K	3780	126	DALI
124082	Ledge recessed	1200x300	Opal	30W	3000K	3780	126	
124344	Ledge recessed	600x600	Opal	18W	4000K	2520	140	DALI
124343	Ledge recessed	600x600	Opal	18W	4000K	2520	140	
124095	Ledge recessed	600x600	Opal	30W	4000K	4043	135	DALI
124094	Ledge recessed	600x600	Opal	30W	4000K	4043	135	
124089	Ledge recessed	600x300	Opal	20W	4000K	2520	126	DALI
124088	Ledge recessed	600x300	Opal	20W	4000K	2520	126	
124084	Ledge recessed	1200x300	Opal	30W	4000K	3885	130	DALI
124394	Ledge recessed	1200x300	Opal	30W	4000K	3885	130	
Accessories:								
121272	Frame w. hatch	600x600	White	Surface mounting				
118650	Frame	600x300	White	Surface mounting				
118023	Frame	1200x300	White	Surface mounting				
118254	Decor plate	600x600	White	Cirkular light opening Ø500				
120701	IP44 protection sheet	600x600	Clear	3mm acrylic (Pmma)				
125540	IP44 protection sheet	600x300	Clear	3mm acrylic (PMMA)				
118886	Monting kit	Wire suspension		Suspended installation				
118885	Monting kit	Recessed installation		Sealed ceilings				
129075	Driver PC with cable for Ledge Recessed/Cenit 2.0 DiSw							

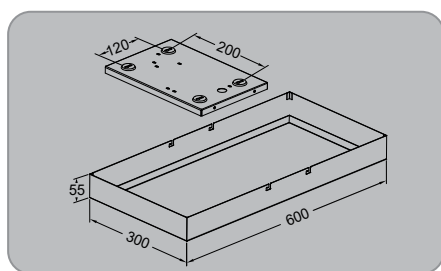

Frame 600x300 - surface mounting

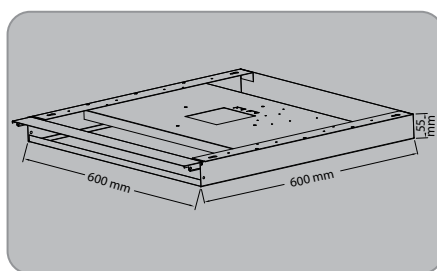

Frame 600x600 w. hatch - surface mounting

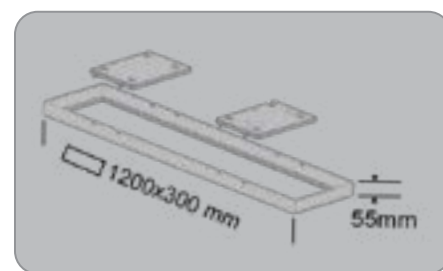

Frame 1200x300 - surface mounting



Decor plate for 600x600 modul - light opening Ø500mm



Ledge Recessed - surface mounted in 600x600 frame



Ledge Recessed - mounted in wire suspension