
Elite asymmetrical - LED floodlight



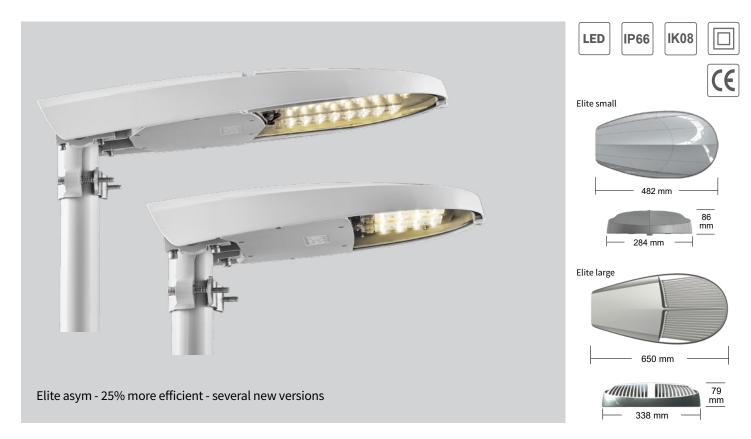

Description

Body in pressure die-cast aluminium with impact 5 mm flat glass. Powder painted in grey - RAL 7035, corrosion class C5. Elite is design to give maximum heat transmission and long lifetime. CLO - Constant Light Output as standard. The fitting gratify EN 62471 requirement for photo biological safety. 6kV Surge Protection Device is integrated.

Application areas

The plain design of the fitting makes Elite suitable in various application areas. By use of the wall fixing Elite is ideal for use as wall light around buildings and plants. Due to the asymmetrical floodlight optics the fitting is primary designed for intensive lighting of pedestrian crossing and lighting of parking lots and other outdoor areas. Ideal for use in combination with Elite Large and Elite Small in areas with the need for a mix of street lighting and flood lighting, giving the possibility to maintain a familiar design.

Mounting

The fixing bracket in die-cast aluminium, is reversible for mounting on arm or pole top \emptyset 40-76mm, can be tilted in steps of 5° . As standard the fitting is supplied with $2x2,5mm^2$ cable, 12m length on large and 8m length on small.

On request

- NR automatic Night Reduction
- 10kV Surge Protection Device
- Alternative effects and luminous flux
- Other cable lengths or Wieland quick connector
- Can be delivered with all open light control systems

Colour index: Ra >70
Colour tolerance: MacAdams 3
Lifetime: 100 000h L90B10
Weight small / large: 6,0 kg / 11,3 kg
Vind surface small / large: 0,032 m² / 0,043 m²

System efficiency up till 165 lm/W.

Number	Туре	Light source			Control
125964	Elite small Asym	32LED-8600lm	56W	730	
125963	Elite small Asym	32LED-8600lm	56W	730	2xZhaga
122130	Elite small Asym	32LED-9000lm	56W	740	-
125983	Elite large Asym	48LED-17000lm	110W	730	
125982	Elite large Asym	48LED-17000lm	110W	730	2xZhaga
123910	Elite large Asym	48LED-18000lm	110W	740	_
124220	Elite large Asym	48LED-18000lm	110W	740	2xZhaga
Accessories:					
123925	10kV Surge Protection Device with LED indicator				
122520	Photo-cell kit - twilight relay (for Ledge small only)				

Wall bracket - Ø48x200 mm - 10°



10kV Surge Protection Device with LED indicator

119012