


Elite large



Elite large - 25% more efficient - several new versions

Description

Body in pressure die-cast aluminium with impact 5 mm flat glass. Powder painted in grey - RAL 7035, corrosion class C5. The fitting is equipped with 2-5 LED modules. Elite is design to give maximum heat transmission and long lifetime. CLO - Constant Light Output as standard. The fitting gratify EN 62471 requirement for photo biological safety. 6kV Surge Protection Device is integrated.

Application areas

The plain design of the fitting makes Elite suitable in various application areas. By use of the wall fixing Elite is ideal for use as wall light around buildings and plants. Due to the street light optics the fitting is suitable for use both in urban and rural roads, area lighting, parking facilities, roundabouts and other outdoor areas.

Mounting

The fixing bracket in die-cast aluminium, is reversible for mounting on arm or pole top Ø40-76mm, can be tilted in steps of 5°. The fitting is supplied with 2x2,5mm² cable, 12m length as standard.

On request

- 10kV Surge Protection Device
- Alternative effects and luminous flux
- Other cable lengths
- Can be delivered with all open light control systems
- Night reduction with other levels/time settings or without NR
- See separate product sheet for asymmetrical floodlight version

Colour index: 4000K RA >70
3000K RA >70

Colour tolerance: MacAdam 3
Lifetime: 100 000h L90B10
Weight: 11,3 kg
Vind surface: 0,043 m²

System efficiency up till 166 lm/W.



Elite large



DEFA no	Type	Light source			Control	lm fitting	lm/W	Weight
126002	Elite large	32LED 11500lm	75W	730		11557lm	155	11,3 kg
126001	Elite large	32LED 11500lm	75W	730	NR	11557lm	155	11,3 kg
123700	Elite large	32LED 12000lm	75W	740		12004lm	161	11,3 kg
123790	Elite large	32LED 12000lm	75W	740	NR	12004lm	161	11,3 kg
125999	Elite large	48LED 14000lm	90W	730		14233lm	158	11,3 kg
125998	Elite large	48LED 14000lm	90W	730	NR	14233lm	158	11,3 kg
123800	Elite large	48LED 15000lm	90W	740		14896lm	165	11,3 kg
123880	Elite large	48LED 15000lm	90W	740	NR	14896lm	165	11,3 kg
125996	Elite large	48LED 17000lm	113W	730		17132lm	154	11,3 kg
125994	Elite large	48LED 17000lm	113W	730	NR	17132lm	154	11,3 kg
123890	Elite large	48LED 18000lm	113W	740		18127lm	161	11,3 kg
123900	Elite large	48LED 18000lm	113W	740	NR	18127lm	161	11,3 kg
125992	Elite large	64LED 21000lm	132W	730		21084lm	158	11,3 kg
125991	Elite large	64LED 21000lm	132W	730	NR	21084lm	158	11,3 kg
123920	Elite large	64LED 22000lm	132W	740		21872lm	166	11,3 kg
123930	Elite large	64LED 22000lm	132W	740	NR	21872lm	166	11,3 kg
125989	Elite large	64LED 25000lm	167W	730		25195lm	153	11,3 kg
125988	Elite large	64LED 25000lm	167W	730	NR	25195lm	153	11,3 kg
123950	Elite large	64LED 26000lm	167W	740		26516lm	159	11,3 kg
123970	Elite large	64LED 26000lm	167W	740	NR	26516lm	159	11,3 kg
125986	Elite large	80LED 31500lm	217W	730		31401lm	144	11,5 kg
125985	Elite large	80LED 31500lm	217W	730	NR	31401lm	144	11,5 kg
124180	Elite large	80LED 33000lm	217W	740		33392lm	154	11,5 kg
124190	Elite large	80LED 33000lm	217W	740	NR	33392lm	154	11,5 kg


NR = Night Reduction in accordance with NMF01: 2023, 100% - 60% - 40% - 60% - 100%

Accessories:

- 128901 10kV Surge Protection Device with LED indicator
- 125490 Backlight cover kit - Elite large



10kV Surge Protection Device with LED indicator

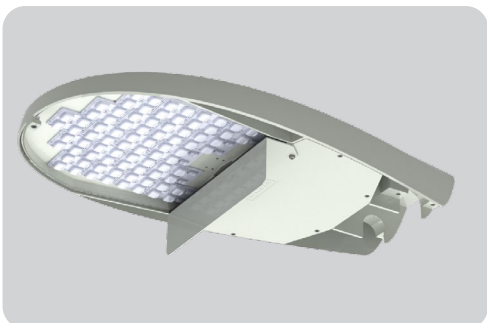

Backlight cover - kit

