


Elite small

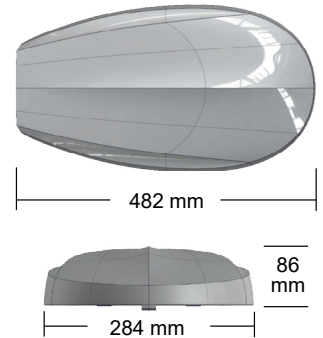

Elite small - 25% more efficient - several new versions

Description

Body in pressure die-cast aluminium with impact 5 mm flat glass. Powder painted in grey - RAL 7035, corrosion class C5. Elite is design to give maximum heat transmission and long lifetime, with a plain surface without any visible cooling ribs.

CLO - Constant Light Output as standard.

The fitting gratify EN 62471 requirement for photo biological safety. 6kV Surge Protection Device is integrated.

Application areas

The plain design of the fitting makes Elite suitable in various application areas. By use of the wall fixing Elite is ideal for use as wall light around buildings and plants. Due to the street light optics the fitting is ideal for use along minor roads, tracks, foot and cycle paths and parking areas.

Mounting

The fitting is supplied with 2x1,5mm² cable, 8m length. The fixing bracket in die-cast aluminium, is reversible for mounting on arm or pole top Ø40-76mm, can be tilted in steps of 5°.

On request

- 10kV Surge Protection Device
- Alternative effects and luminous flux
- Other cable lengths
- Adapted for all open light control systems
- Night reduction with other levels/time settings
- Photo-cell kit
- Zhaga connector

Light source

Colour index: 4000K RA >70
3000K RA >70
Lifetime: 100 000h L90B10
Weight: 6 kg
Vind surface: 0,032 m²

System efficiency up till 161 lm/W.



Elite small



DEFA no	Type	Light source	Control	lm fitting	lm/W	Weight
125966	Elite small	8LED 2100 lm	15W 730	2110 lm	140	6 kg
123590	Elite small	8LED 2200lm	15W 740	2215 lm	148	6 kg
125978	Elite small	16LED 4200 lm	28W 730	4247 lm	150	6 kg
125977	Elite small	16LED 4200 lm	28W 730	4247 lm	150	6 kg
123610	Elite small	16LED 4400 lm	28W 740	4397 lm	157	6 kg
123560	Elite small	16LED 4400 lm	28W 740	4397 lm	157	6 kg
125975	Elite small	24LED 6200lm	41W 730	6357 lm	153	6 kg
125973	Elite small	24LED 6200lm	41W 730	6357 lm	153	6 kg
123620	Elite small	24LED 6600lm	41W 740	6606 lm	161	6 kg
123630	Elite small	24LED 6600lm	41W 740	6606 lm	161	6 kg
125970	Elite small	32LED 8600lm	56W 730	8651 lm	152	6 kg
125969	Elite small	32LED 8600lm	56W 730	8651 lm	152	6 kg
123670	Elite small	32LED 9000lm	56W 740	9042 lm	159	6 kg
123680	Elite small	32LED 9000lm	56W 740	9042 lm	159	6 kg

NR = Automatic Night Reduction 50%, ~ hr 23-05

Accessories:


- 122520 Photo-cell kit - twilight relay
- 128901 10kV Surge Protection Device with LED indicator
- 125510 Backlight cover kit - Elite small



Photo cell kit



10kV Surge Protection Device with LED indicator

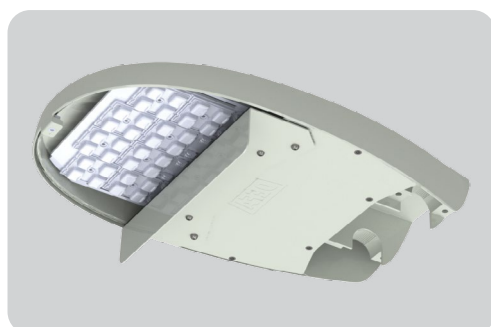

Backlight cover - kit

