


LED - Retrofit module

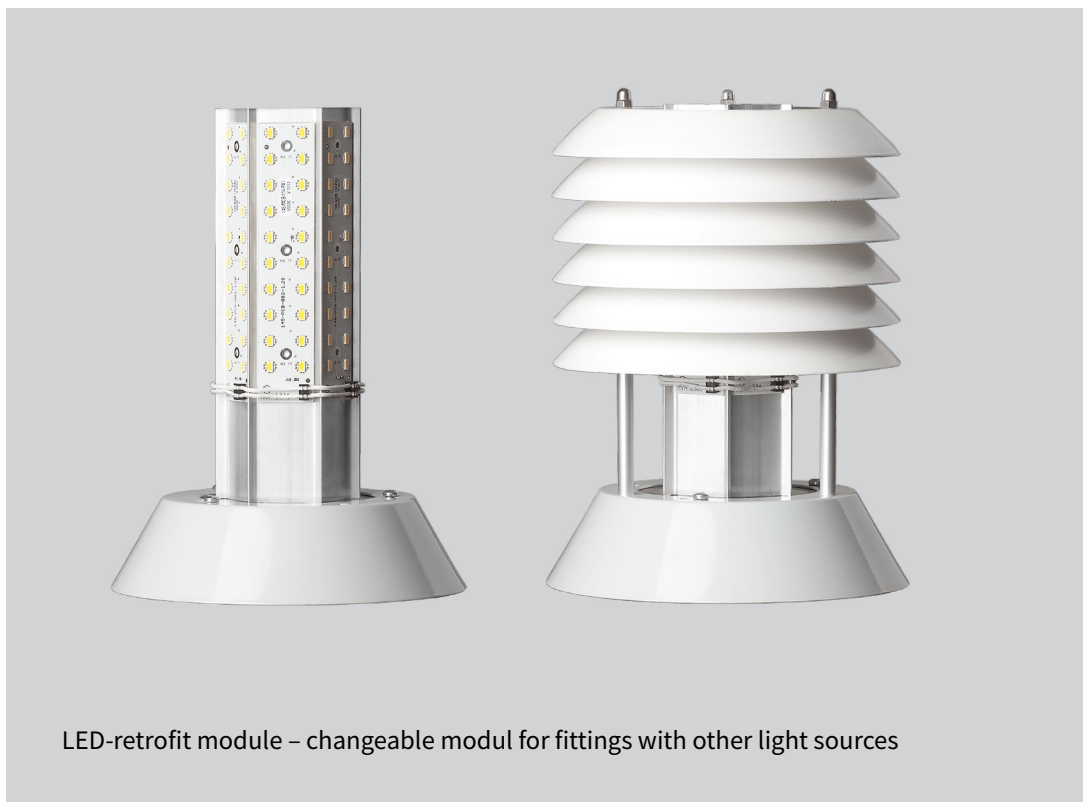

LED-retrofit module – changeable modul for fittings with other light sources

Description

Changeable module for fittings in DEFAs Park and Bollard programme.

Monting

See separate mounting instruction.

Application areas

Footpaths, entrances, parks, pedestrian streets, parking area etc.

LED modul	830	840
Total effect:	35,5W	35,5W
Colour temperature:	3000K	4000K
Lumini\ous flux LED module:	4428lm	4600 lm
Colour index RA:	85	85
Colour toleranse MacAdam:	3 SDCM	3 SDCM
Life time L70:	90 000 h	90 000 h
Ambient temperature:	Ta: 25°C	Ta: 25°C



Athene Park Elsa Park



Helena Park Helena Bollard

Number	Type			Light source
116295	LED-module	Park	w. reflector set	LED 36W 4000
116296	LED-module	Park	w. reflector set	LED 36W 3000
116297	LED-module	Park		LED 36W 4000
116298	LED-module	Park		LED 36W 3000
120462	LED-module	Bollard	w. reflector set	LED 25W 4000
120463	LED-module	Bollard	w. reflector set	LED 25W 3000
120464	LED-module	Bollard		LED 25W 4000
120465	LED-module	Bollard		LED 25W 3000