
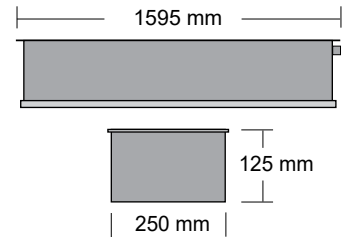


Tunnel HT

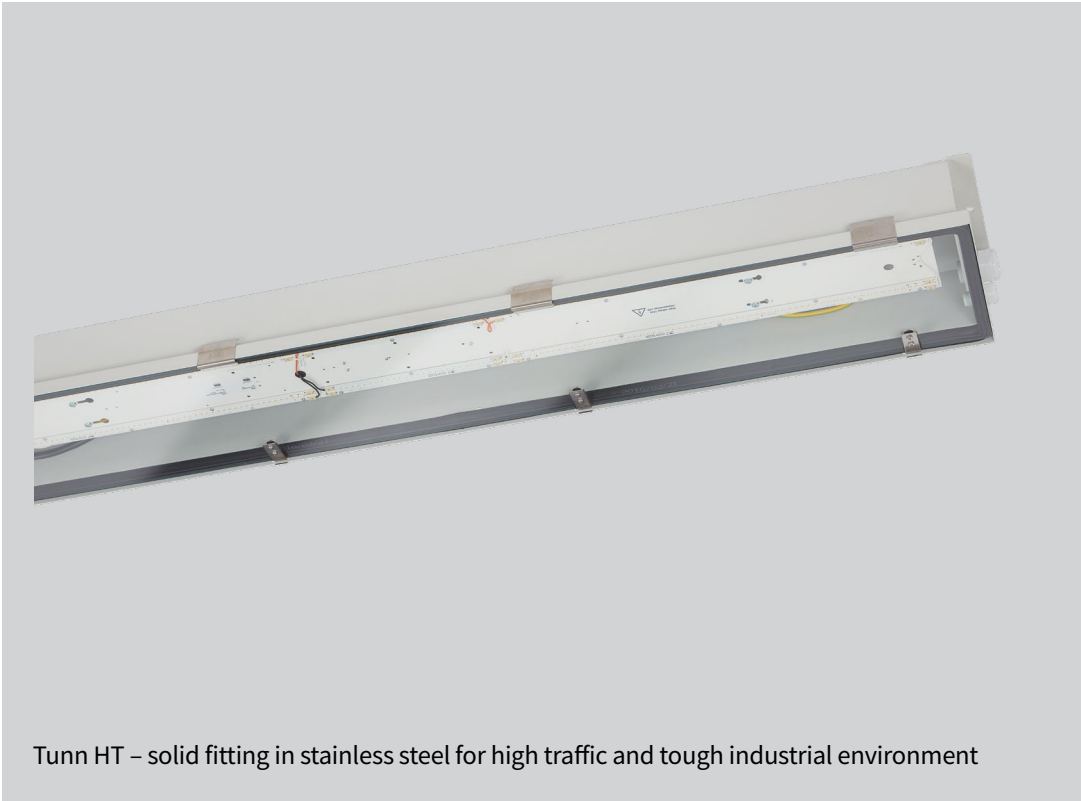

Tunn HT – solid fitting in stainless steel for high traffic and tough industrial environment

Description

Body in stainless steel AISI 316L. Tempered flat glass. Symmetric reflector of aluminium. The body is painted in RAL 7035 light grey. The fitting is standard with electronic control gear.

Application area

The fitting is developed for use in tunnels with high traffic, but the fitting is also ideal for use in industry plants and rough environments.

Installation

Fixing in each end $\varnothing 12,5\text{mm}$, c/c-1562mm. cable glands in each end, through wiring $5 \times 10\text{mm}^2$.

Other

The fitting can be prepared for dimming via 230V control signals.

Number	Type	System effect	Control
On request	Tunn HT	LED 35W	DALI
On request	Tunn HT	LED 35W	50MinMax
On request	Tunn HT	LED 65W	DALI
On request	Tunn HT	LED 65W	50MinMax
On request	Tunn HT	LED 70W	DALI
On request	Tunn HT	LED 70W	50MinMax
On request	Tunn HT	LED 110W	DALI
On request	Tunn HT	LED 110W	50MinMax
On request	Tunn HT	LED 115W	DALI
On request	Tunn HT	LED 115W	50MinMax