



DEFA ProPlug™ inlet cable

Item numbers: See page 2

DEFA ProPlug™ inlet cable

The ProPlug inlet cable consists of a armoured cable with the ProPlug connector incl. cover in one end (A) and the PlugIn HP connector in the other (B). A grounding cable (C) is also fitted to the PlugIn HP end.


The ProPlug inlet cable is suitable for all new vehicles. It is easily flush mounted. The ProPlug was developed with durability, safety, maximum ease of installation and optimum user-friendliness in mind.

Use & Installation

The ProPlug connector must be installed in a place where the ProPlug connecting cable can easily be connected. Fit and install parts according to the enclosed usage & installation guide.

Maintenance

Apply some silicon spray on the ProPlug contact terminals under the cover (A) before and after the season and ensure that either the cable or cover is damaged. Install a new cable if the cover is damaged.

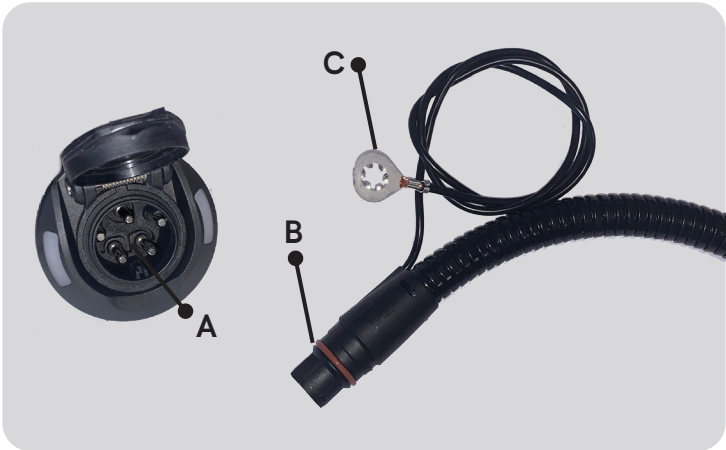

Specifications

Item numbers:

465001	0.6m	340gr	14pr assembly box
465002	1.0m	490gr	14pr assembly box
465003	1.5m	680gr	14pr assembly box
465004	2.0m	870gr	14pr assembly box

Voltage:

250V

Fuse:

20A

Length:

0.6 / 1.0 / 1.5 / 2.0 m

ProPlug IP rating:

55

PlugIn HP IP rating:

6K9K

Testing & acceptance

IEC 61984 / EN 60309-1. DEFA AS is conforming to the requirements ISO 9001, ISO 14001 and ISO 45001. In addition to this, our engine heaters and cables are conforming to the requirements of IATF 16949.

465001-4 E00 19022025 HG