




W = Width, D = Depth, H = Height



230V~ 50Hz

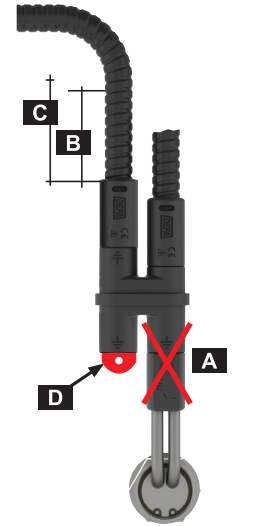

## H-connector

To connect the interior heater and engine heater together.  
Contains contact rails only to secure the electrical connections.

The engine heater must be connected to a extension cable only.  
NOT directly to the H-connector **A**.

The DEFA PlugIn H-connector must not be installed/placed under  
the engine to avoid mechanical stress or directly splashing from  
the road.

Fasten the H-connector using cable ties max 5,0cm on the cable  
from the PlugIn contact **B**. Do not bend the cable closer than  
5,0cm from the PlugIn contact **C**.  
Connectors NOT in use must be sealed with red plugs **D**.

DEFA AS is conforming to the requirements of both ISO 9001-  
2008, ISO 14001:2004 and OHSAS 18001:2007. In addition to  
this, our engine heaters and cables are conforming to the  
requirements of ISO/TS 16949:2002.

### Item number

460857 (Weight: 30gr.)

Assembly box: 100 units.

### Part of

DEFA H-connector is delivered separately and as a part of some DEFA kits.

### Use & Installation

Confer the enclosed product installation guide.

### Technical specifications

Voltage [V]	250
Current [A]	16
W/D/H [mm]	48/53/24
IP rating [IP]	44
Testing & acceptance	EN 50066

[www.defa.com](http://www.defa.com)