


# LED - Retrofit module

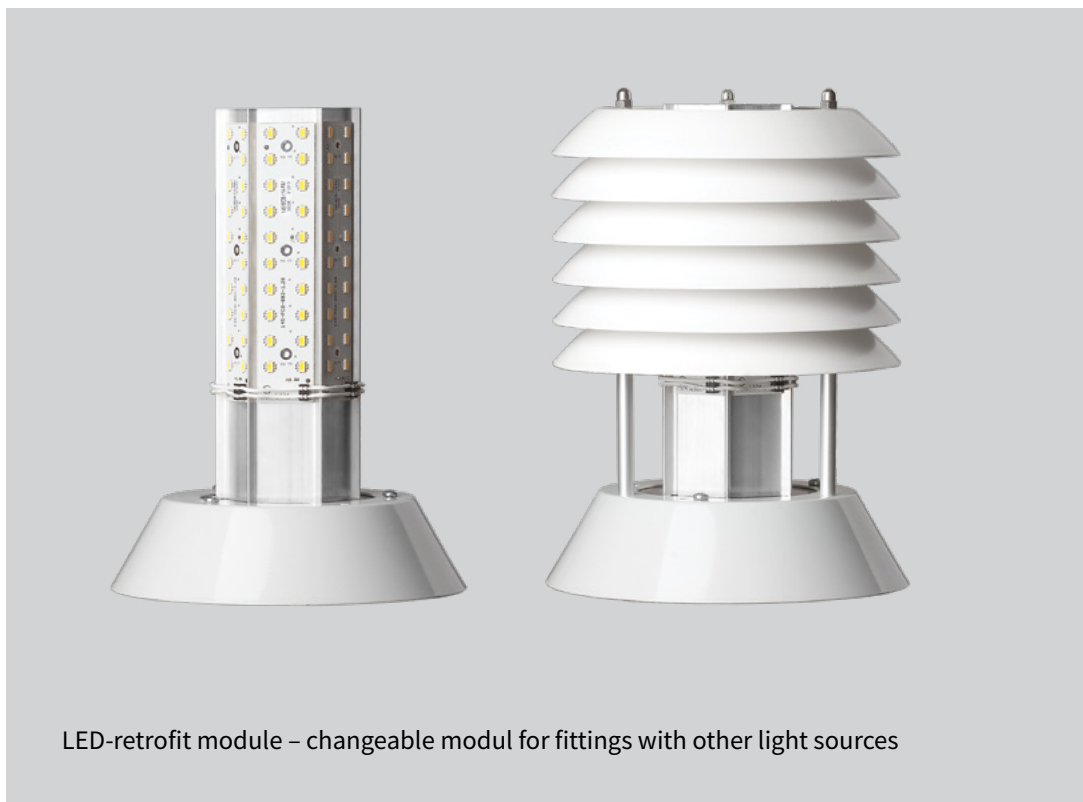

LED-retrofit module – changeable modul for fittings with other light sources

## Description

Changeable module for fittings in DEFAs Park and Bollard programme.

## Application areas

Footpaths, entrances, parks, pedestrian streets, parking area etc.

## Monting

See separate mounting instruction.

## Fittings (pcs) each circuit

	10-B	10-C	16-B	16-C
25W	23	37	36	58
36W	23	37	36	58



Athene Park

Elsa Park

LED modul	830	840
Total effect:	35,5W	35,5W
Colour temperature:	3000K	4000K
Lumini\ous flux LED module:	4428lm	4600 lm
Colour index RA:	85	85
Colour toleranse MacAdam:	3 SDCM	3 SDCM
Life time L70:	90 000 h	90 000 h
Ambient temperature:	Ta: 25°C	Ta: 25°C



Helena Park

Helena Bollard

Number	Type			Light source
116295	LED-module	Park	w. reflector set	LED 36W 4000
116296	LED-module	Park	w. reflector set	LED 36W 3000
116297	LED-module	Park		LED 36W 4000
116298	LED-module	Park		LED 36W 3000
120462	LED-module	Bollard	w. reflector set	LED 25W 4000
120463	LED-module	Bollard	w. reflector set	LED 25W 3000
120464	LED-module	Bollard		LED 25W 4000
120465	LED-module	Bollard		LED 25W 3000