
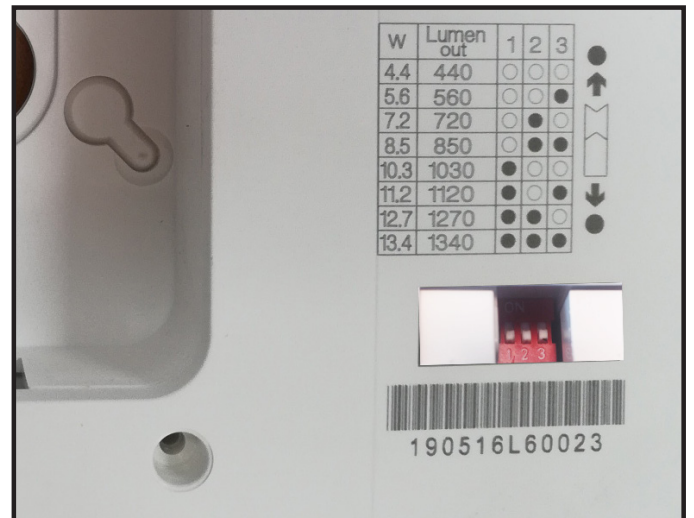


## LightAdjust instruction

W	lumen out	1	2	3
4,4	440	○	○	○
5,6	560	○	○	●
7,2	720	○	●	○
8,5	850	○	●	●
10,3	1030	●	○	○
11,2	1120	●	○	●
12,7	1270	●	●	○
13,4	1340	●	●	●



### LightAdjust - adjustable light

Fittings marked with "LightAdjust" are equipped with a setting which makes it possible to set the preferred light level in 8 steps, from 440 up to 1340 lumen. By delivery the fittings are set on 1000 lumen.



### LightAdjust - justerbart lys

På armaturer markert med "LightAdjust" fins en innstilling som gir muligheten til å stille ønsket lysnivå i 8 trinn, fra 440 til 1340 lumen. Ved levering er armaturen innstilt på 1000 lumen.



### LightAdjust - justerbart ljus

På armaturer markerade med LightAdjust finns en inställning som ger möjligheten att ställa önskad ljusnivå i 8 steg, från 440 till 1340 lumen. Vid leverans är armaturen inställd på 1000 lumen.



### LightAdjust - valontuoton asetus

"LightAdjust" -merkinnällä varustetut valaisimet on varustettu 8-portaisella DIP-kytkimellä, mikä mahdollistaa valotason asettamisen välille 440 – 1340 lumenia. Toimituksessa valotaso on asetettu 1000 lumeniin.