




Charge kit 12VDC 1x12A

Item number: 706252

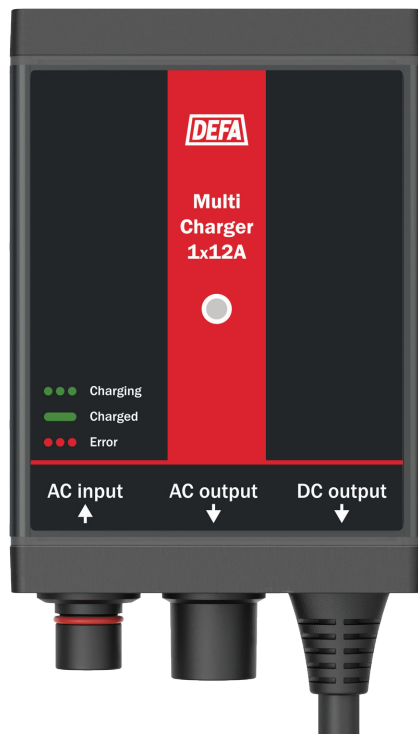

W

H

H = Height, W = Width, D = Depth



Charge kit 12VDC 1x12A

The charge kit contains of:

- 1 x 705200 MultiCharger 1x12A battery charger
- 1 x 460939 MiniPlug inlet cable (2,0m)
- 1 x 460957 MiniPlug Xtreme connection cable (5,0m)
- Weight: 2,1kg

All parts are also available as single products.
The kit can be connected to another charger or engine heater.

Installation

Equipment damage and possible injuries may result from an incomplete understanding of the installation and operation of the charger. If you are unfamiliar with electrical systems: consult us, a dealer or a licensed electrician.

Read the mounting and user guide carefully.

Technical specifications - 705200

Input voltage [VAC]	230
Rated power [W]	190
Operating temperature [°C]	-35/+50
Charging voltage* [VDC]	14,4
Maintenance charging [VDC]	13,6
Charging current [A]	12
Battery size, max [Ah]	150
IP rating [IP]	44
H/W/D [mm]	138x98x53
Weight [kg]	1
Protection class	1
Certifications	EN60335-1, EN60335-2-29, EN55014-1, EN55014-2, EN61003-3/2

* Temperature-compensated approx 5,0 mV/°C/cell. Ref. 25°C.



SCAN ME
defa.com

DEFA AS is conforming to the requirements ISO 9001, ISO 14001 and ISO 45001. In addition to this, our engine heaters and cables are conforming to the requirements of IATF 16949.